


SHEAVE BEARINGS



Sheave Bearings Double Row Full Compliment Cylindrical Roller Bearings

Series E5000X NNTS1

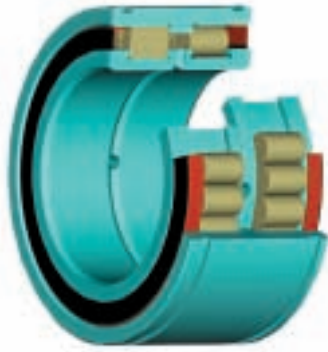

Highest Dynamic & Static Load Ratings

Maximum Utilization of the Bearing Section Provides the Highest Possible Load Ratings

Superior Sealing Capability

Unique Design Rubber Contact Seal on Both Sides of the Bearing
Prevents Dust and Water Intrusion

Assembly: Easy to Locate Axially by Using Snap Rings on Both Sides of the Outer Ring

Lubrication: Lithium-Soap Based Grease with EP Additives


Relubrication: Lubricate Through the Lubrication Holes & Groove on the Inner Ring

Operating Temperature Range: -30 to 80°C (-35 to 175°F)

Application: Highly Suitable in Rope Sheaves

Bearing No.	Boundary Dimensions (mm)									Basic Load Ratings (N)			
	d (inch)	D (inch)	B (inch)	C (inch)	r(min)	c	Cr (lbf)	Cor (lbf)					
E5008X NNTS1	40	68	38	37	0.6	1.5	79,000	17,800	125,000	28,100			
E5009X NNTS1	45	75	40	39	0.6	1.5	95,000	21,400	144,000	32,400			
E5010X NNTS1	50	80	40	39	0.6	1.5	99,500	22,400	158,000	35,500			
E5011X NNTS1	55	90	46	45	0.6	2	117,000	26,300	193,000	43,400			
E5012X NNTS1	60	95	46	45	0.6	2	123,000	27,700	208,000	46,800			
E5013X NNTS1	65	100	46	45	0.6	2	128,000	28,800	224,000	50,400			
E5014X NNTS1	70	110	54	53	0.6	2	170,000	38,200	285,000	64,100			
E5015X NNTS1	75	115	54	53	0.6	2	177,000	39,800	305,000	68,600			
E5016X NNTS1	80	125	60	59	0.6	2	250,000	56,200	430,000	96,700			
E5017X NNTS1	85	130	60	59	0.6	2	255,000	57,300	445,000	100,000			
E5018X NNTS1	90	140	67	66	0.6	2.5	305,000	68,600	540,000	121,000			
E5019X NNTS1	95	145	67	66	0.6	2.5	310,000	69,700	560,000	126,000			
E5020X NNTS1	100	150	67	66	0.6	2.5	315,000	70,800	585,000	132,000			
E5022X NNTS1	110	170	80	79	1	3	380,000	85,400	695,000	156,000			
E5024X NNTS1	120	180	80	79	1	3	400,000	89,900	750,000	169,000			
E5026X NNTS1	130	200	95	94	1	3	535,000	120,000	1,000,000	225,000			
E5028X NNTS1	140	210	95	94	1	3	540,000	121,000	1,070,000	241,000			
E5030X NNTS1	150	225	100	99	1	3.5	620,000	139,000	1,210,000	272,000			
E5032X NNTS1	160	240	109	108	1.5	3.5	715,000	161,000	1,390,000	312,000			
E5034X NNTS1	170	260	122	121	1.5	3.5	850,000	191,000	1,730,000	389,000			
E5036X NNTS1	180	280	136	135	1.5	3.5	1,060,000	238,000	2,140,000	481,000			
E5038X NNTS1	190	290	136	135	1.5	3.5	1,110,000	250,000	2,230,000	501,000			
E5040X NNTS1	200	310	150	149	1.5	3.5	1,300,000	292,000	2,650,000	596,000			
E5044X NNTS1	220	340	160	159	1.5	4	1,500,000	337,000	3,100,000	697,000			
E5048X NNTS1	240	360	160	159	1.5	4	1,560,000	351,000	3,350,000	753,000			
E5052X NNTS1	260	400	190	189	2	5	2,110,000	474,000	4,500,000	1,012,000			
E5056X NNTS1	280	420	190	189	2	5	2,200,000	495,000	4,850,000	1,090,000			

NOTE: Phosphate coating for protection against corrosion is available upon request.

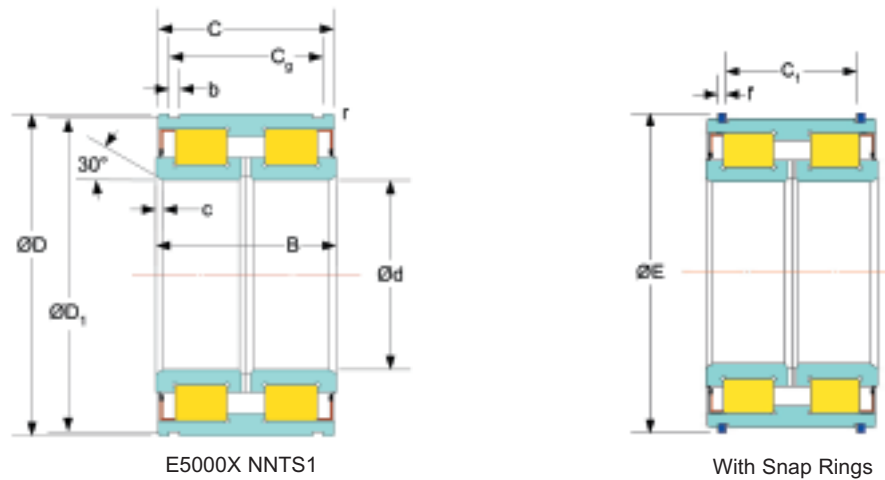

E5000X NNTS1

With Snap Rings

Groove Dimensions (mm)			Limiting Speed (rpm) (grease)	Mass (kg)
D ₁	C _g	b		
65.8	32.2	2.7	2,500	0.55
72.8	34.2	2.7	2,200	0.70
77.8	34.2	2.7	2,000	0.75
87.4	40.2	3.2	1,800	1.15
92.4	40.2	3.2	1,650	1.20
97.4	40.2	3.2	1,500	1.30
107.1	48.2	4.2	1,400	1.90
112.1	48.2	4.2	1,350	2.00
122.1	54.2	4.2	1,250	2.65
127.1	54.2	4.2	1,150	2.80
137	59.2	4.2	1,100	3.70
142	59.2	4.2	1,050	3.90
147	59.2	4.2	1,000	4.05
167	70.2	4.2	900	6.50
176	71.2	4.2	850	6.95
196	83.2	4.2	750	10.5
206	83.2	5.2	700	11.0
221	87.2	5.2	650	13.5
236	95.2	5.2	600	16.5
254	107.2	5.2	600	22.5
274	118.2	5.2	550	30.0
284	118.2	5.2	500	31.5
304	128.2	6.3	500	40.5
334	138.2	6.3	450	52.0
354	138.2	6.3	400	55.5
394	162.2	6.3	350	85.0
413	163.2	7.3	350	90.9

Snap Ring Dimensions (mm)								Bearing No.
NR Type				WRE Type				
P/N	E	C ₁	f	P/N	E	C ₁	f	
NR 68E	71.4	28.20	2.0	WRE 68	75	28.00	2.0	E5008X NNTS1
NR 75E	78.4	30.20	2.0	WRE 75	82	30.20	2.0	E5009X NNTS1
NR 80E	83.4	30.20	2.0	WRE 80	87	30.20	2.0	E5010X NNTS1
NR 90E	94.2	35.20	2.5	WRE 90	99	35.20	2.5	E5011X NNTS1
NR 95E	99.2	35.20	2.5	WRE 95	104	35.20	2.5	E5012X NNTS1
NR 100E	104.2	35.20	2.5	WRE 100	109	35.20	2.5	E5013X NNTS1
NR 110E	116.6	43.38	2.41	WRE 110	119	43.38	2.41	E5014X NNTS1
NR 115E	126.4	43.20	2.5	WRE 115	124	43.20	2.5	E5015X NNTS1
NR 125E	136.4	49.20	2.5	WRE 125	137	49.20	2.5	E5016X NNTS1
NR 130E	141.4	49.20	2.5	WRE 130	142	49.20	2.5	E5017X NNTS1
NR 140E	151.3	54.20	2.5	WRE 140	152	54.20	2.5	E5018X NNTS1
NR 145E	156.3	54.20	2.5	WRE 145	157	54.20	2.5	E5019X NNTS1
NR 150E	161.3	54.20	2.5	WRE 150	162	54.20	2.5	E5020X NNTS1
NR 170E	181.3	65.20	2.5	WRE 170	182	65.20	2.5	E5022X NNTS1
NR 180E	195.2	65.10	3.05	WRE 180	196	65.10	3.05	E5024X NNTS1
NR 200E	215.2	77.10	3.05	WRE 200	216	77.10	3.05	E5026X NNTS1
NR 210E	223.0	77.20	3.0	WRE 210	226.0	77.20	3.0	E5028X NNTS1
NR 225E	238.0	81.20	3.0	WRE 225	245.0	81.20	3.0	E5030X NNTS1
NR 240E	253.0	89.20	3.0	WRE 240	260.0	89.20	3.0	E5032X NNTS1
NR 260E	276.0	99.20	4.0	WRE 260	282.0	99.20	4.0	E5034X NNTS1
NR 280E	296.0	108.20	5.0	WRE 280	302.0	108.20	5.0	E5036X NNTS1
NR 290E	306.0	108.20	5.0	WRE 290	312.0	108.20	5.0	E5038X NNTS1
NR 310E	326.0	118.20	5.0	WRE 310	336.0	118.20	5.0	E5040X NNTS1
NR 340E	359.0	126.20	6.0	WRE 340	366.0	126.20	6.0	E5044X NNTS1
NR 360E	379.0	126.20	6.0	WRE 360	386.0	126.20	6.0	E5048X NNTS1
NR 400E	419.0	148.20	7.0	WRE 400	426.0	148.20	7.0	E5052X NNTS1
NR 420E	441.0	149.20	7.0	WRE 420	453.0	149.20	7.0	E5056X NNTS1

NOTE: Snap rings are not included in delivery, but are available upon request.

Technical Information

Interchange

NACHI	INA	SKF
E5008X NNTS1	SL04 5008PP	NNF 5008 ADA-2LSV
E5009X NNTS1	SL04 5009PP	NNF 5009 ADA-2LSV
E5010X NNTS1	SL04 5010PP	NNF 5010 ADA-2LSV
E5011X NNTS1	SL04 5011PP	NNF 5011 ADA-2LSV
E5012X NNTS1	SL04 5012PP	NNF 5012 ADA-2LSV
E5013X NNTS1	SL04 5013PP	NNF 5013 ADA-2LSV
E5014X NNTS1	SL04 5014PP	NNF 5014 ADA-2LSV
E5015X NNTS1	SL04 5015PP	NNF 5015 ADA-2LSV
E5016X NNTS1	SL04 5016PP	NNF 5016 ADA-2LSV
E5017X NNTS1	SL04 5017PP	NNF 5017 ADA-2LSV
E5018X NNTS1	SL04 5018PP	NNF 5018 ADA-2LSV
E5019X NNTS1	SL04 5019PP	NNF 5019 ADA-2LSV
E5020X NNTS1	SL04 5020PP	NNF 5020 ADA-2LSV
E5022X NNTS1	SL04 5022PP	NNF 5022 ADA-2LSV
E5024X NNTS1	SL04 5024PP	NNF 5024 ADA-2LSV
E5026X NNTS1	SL04 5026PP	NNF 5026 ADA-2LSV
E5028X NNTS1	SL04 5028PP	NNF 5028 ADA-2LSV
E5030X NNTS1	SL04 5030PP	NNF 5030 ADA-2LSV
E5032X NNTS1	SL04 5032PP	NNF 5032 ADA-2LSV
E5034X NNTS1	SL04 5034PP	NNF 5034 ADA-2LSV
E5036X NNTS1	SL04 5036PP	NNF 5036 ADA-2LSV
E5038X NNTS1	SL04 5038PP	NNF 5038 ADA-2LSV
E5040X NNTS1	SL04 5040PP	NNF 5040 ADA-2LSV
E5044X NNTS1	SL04 5044PP	NNF 5044 ADA-2LSV
E5048X NNTS1	SL04 5048PP	NNF 5048 ADA-2LSV
E5052X NNTS1	SL04 5052PP	NNF 5052 ADA-2LSV
E5056X NNTS1	SL04 5056PP	NNF 5056 ADA-2LSV

Deviation of Bearing Bore and Width


Nominal Bearing Bore Diameter d (mm)		Deviation of d (μm)		Deviation of B (μm)	
Over	Incl.	High	Low	High	Low
30	50	0	-12	0	-120
50	80	0	-15	0	-150
80	120	0	-20	0	-200
120	150	0	-25	0	-250
150	180	0	-25	0	-250
180	250	0	-30	0	-300
250	280	0	-35	0	-350

Deviation of Bearing O.D.

Nominal Bearing Outside Diameter D (mm)		Deviation of D (μm)	
Over	Incl.	High	Low
50	80	0	-13
80	120	0	-15
120	150	0	-18
150	180	0	-25
180	250	0	-30
250	315	0	-35
315	400	0	-40
400	500	0	-45

Radial Clearance

Nominal Bearing Outside Diameter D (mm)		Standard Radial Clearance (μm)	
Over	Incl.	Low	High
	70	35	70
70	80	40	75
80	100	45	90
100	125	55	105
125	150	65	115
150	180	65	120
180	240	65	130
240	280	70	135
280	310	70	140
310	340	75	150
340	360	90	165
360	420	100	180

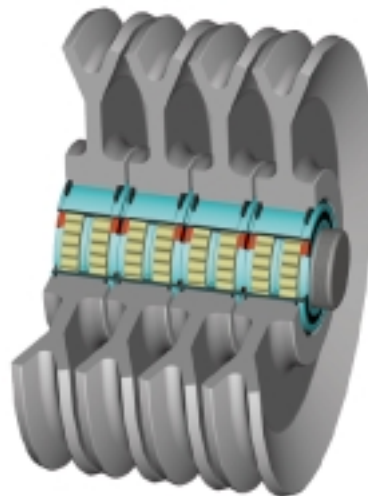

Offices

NACHI AMERICA, INC. CORPORATE HEADQUARTERS

715 Pushville Road
Greenwood, IN 46143
Phone: 888-340-2747
Fax: 888-734-1206

BEARING DIV. HEADQUARTERS

715 Pushville Road
Greenwood, IN 46143
Phone: 888-340-2747
Fax: 888-734-1206

WEST COAST OFFICE

12652 Alondra Boulevard
Cerritos, CA 90703
Phone: 800-548-3903
Fax: 562-802-2455

ENGINEERING LABORATORY NACHI TECHNICAL CENTER

715 Pushville Road
Greenwood, IN 46143
Phone: 317-530-1008
Fax: 317-530-1012

NACHI
NACHI AMERICA INC.

CATALOG NO.: NAB 0201-1

Printed in USA Oct. 2003